


Volvo Construction Equipment  
Building Tomorrow



# EW60E

Volvo Excavators 5.55-6.46 t 47.3 kW

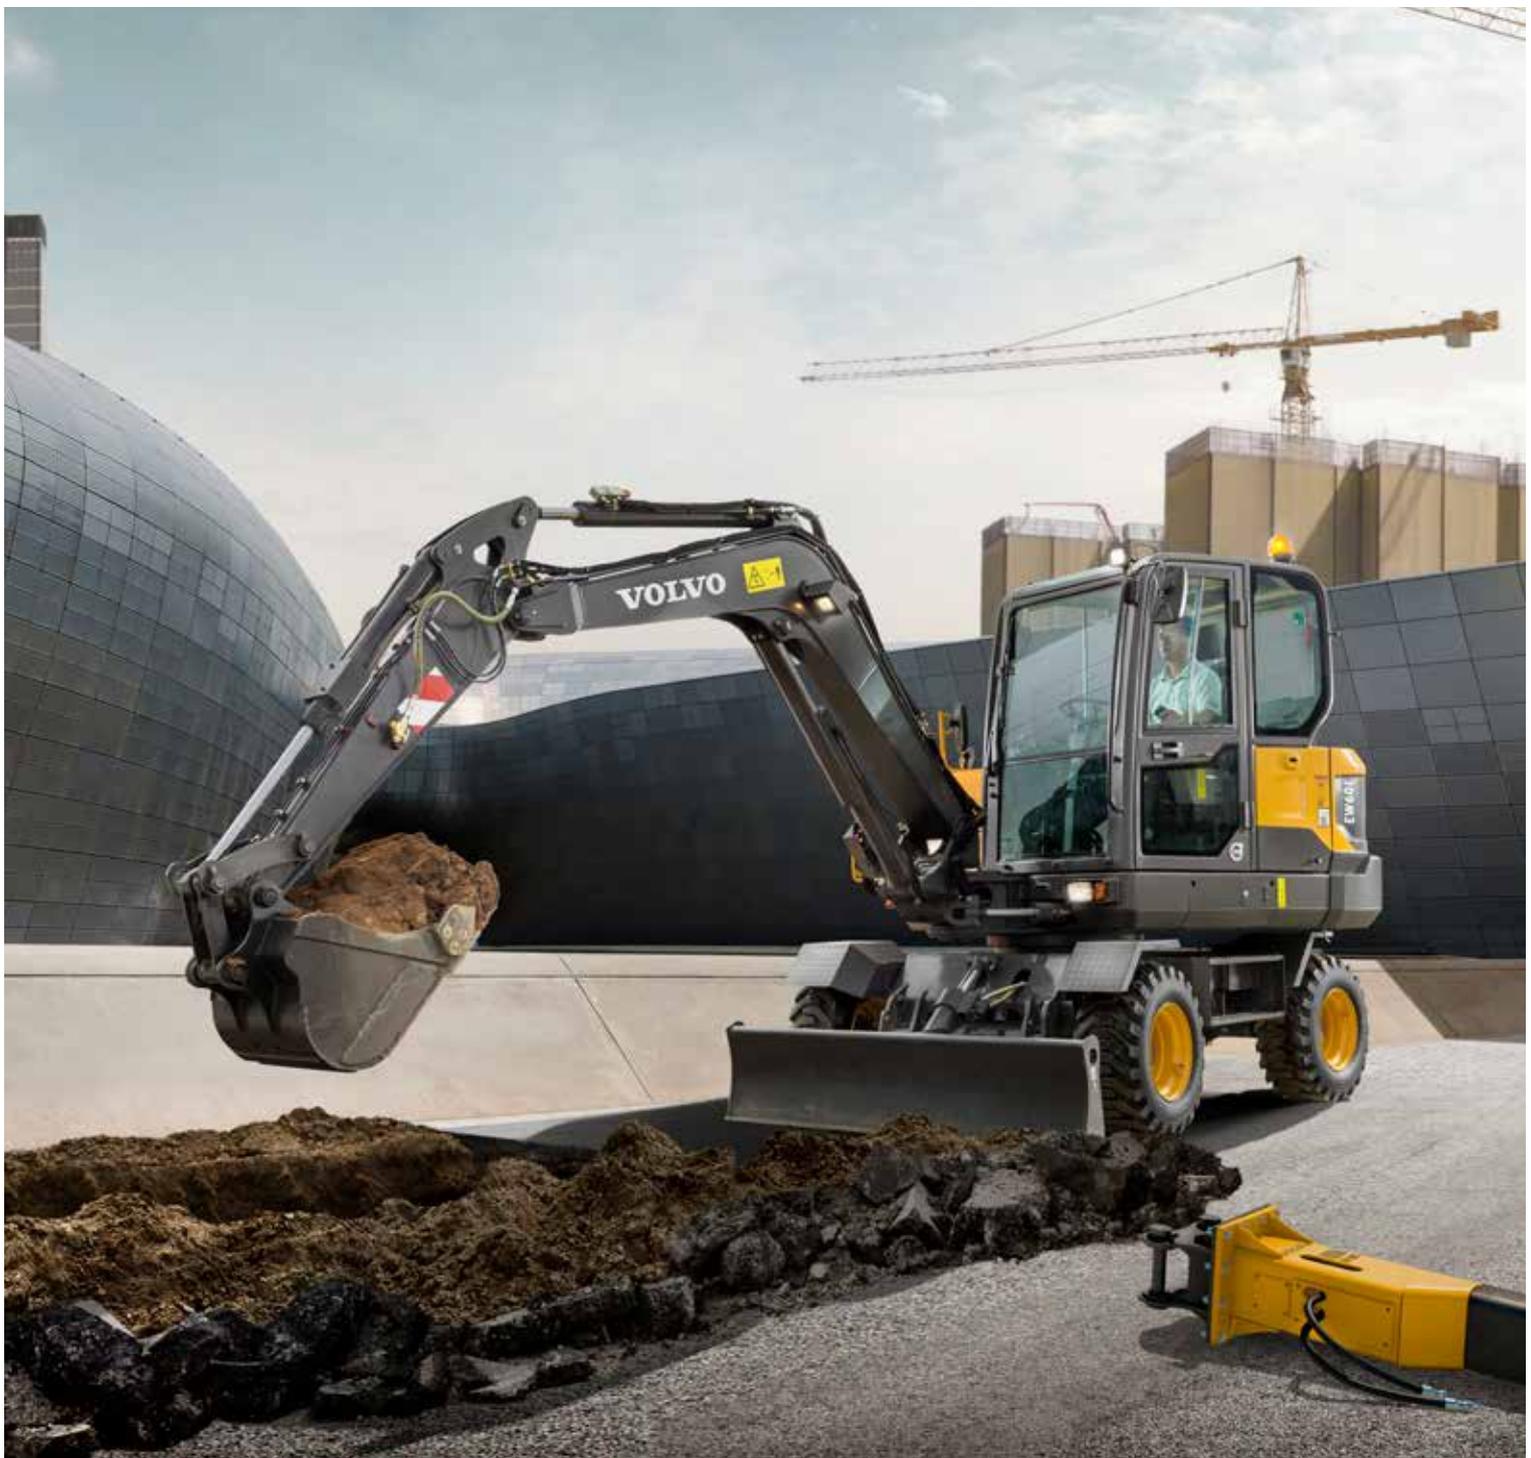

# Space and comfort to work

The EW60E features an innovative cab design for a comfortable and more productive operator environment. Well-designed ergonomics and a modern LCD display give you perfect control in all operations. Plenty of storage space is available for personal belongings.

## Operator convenience

Ample storage space is available for operator comfort and convenience. A phone tray, two power sockets, cup holder and three other large storage areas makes the Volvo cab a more convenient working environment.



## Operator visibility

All-round visibility is enhanced by thin pillars, large glazed area and a large wiper blade. The rear view camera secures a better view for perfect and safe control through the 7" color LCD display. This ensures there are no blind spots even in the most confined working areas.



## Work in comfort

The comfortable and adjustable seat makes it easier for the operator to work hard all day and feel less tired by the end of it. The cab's air conditioning is efficient and in automatic mode, the temperature remains at a set level. Six adjustable vents allow for optimal airflow in the cab.



## Ease of control

Control your machine with minimal effort in order to get more done in less time. The keypad groups all controls on the right hand side and the 7" color LCD screen displays all machine information for access to functions through its easy to use menus. Through the hot keys, the operator can directly access pre-set functions for added convenience. The proportional joystick provides excellent grip, and the roller fits your thumb perfectly for easy and precise control.





# LARGER CAB

A comfortable working space results in better operation, increasing production and reducing fatigue. The cab design creates space behind the seat, allowing the operator to move more freely. The new generation Volvo Cab features excellent visibility and reduced noise levels.



# BOOSTED PERFORMANCE

Do more in less time with outstanding combined digging efforts, powerful travel force, fluid swing force and optimal lifting capacity. The EW60E has been designed to tackle the most challenging job sites and contracts using the powerful Volvo Stage V engine and adjustable hydraulic flow. Its well-balanced driveline delivers optimum performance whether working on the job site or on the move.

# Power for performance

Climb quick, swing smooth, dig hard and load fast with the EW60E. The traction, swing force and lifting capacity gets you results, fast. This versatile and powerful machine can be tailored for any job and is suitable for a wide range of applications.

## Powerful Volvo Stage V engine

Give your job site a boost and achieve fast results. Great power and effective cooling ensure optimized performance in any climate. For the ultimate combination of power and performance, the Stage V engine helps to push through challenging conditions.



## Smooth operation

Smooth combined operations means you can make very accurate and precise movements. With responsive controls the machine does exactly what the operator intends for less fatigue and fluent movement.



## Versatility

Perform on any job site, whether you're working in a confined space or major construction area. The machine's compact design, long arm, optional fixed boom and offset boom, long dozer blade, auxiliary hydraulic and thumb piping makes the machine suitable for a wide range of jobs and applications.



## Wheeled performance

A top speed up to 30km/h and the four wheel drive allow you to go on and off-road for better mobility. Drive the machine easily between locations and access hard to reach job sites to save time and keep your machine in prime condition.



# Profit in your business

The EW60E is designed and built to increase your profitability and keep you working for longer. To reduce your running costs it features excellent service access, convenient maintenance points and Volvo's auto engine shutdown feature. With outstanding fuel efficiency this durable and reliable machine secures your costs and increases your uptime.

## Low fuel consumption

The Volvo engine and hydraulics together offer superior fuel efficiency. The standard auto idle feature helps to reduce your fuel consumption even further and increase your profits.



## Auto engine shutdown

A unique offering from Volvo, the engine stops automatically after a preselected time, lowering fuel costs and noise. A stopped hour meter reduces maintenance costs and increases the resale value of the machine.



## MATRIS and VCADS Pro

By working with your dealer and using Volvo MATRIS software you can analyze operator behavior to improve efficiency, boost productivity and reduce your fuel and maintenance costs. Volvo also offers the VCADS Pro diagnostic system, making it easy to control your machine.



## Durability and reliability

The EW60E is designed with the same high quality as all Volvo machines, including robust transmission system and axles, so you can be assured it's durable and reliable on your job site. You can depend on your machine to perform and work hard for peace of mind.





# SERVICEABILITY

Keep your machine up and running with a number of features combined to increase machine availability and reduce downtime. Ground level service access, including great access to the main control valve, convenient greasing points, a large tool box in the lower structure and an easy to clean cooling unit all reduce service time and maintenance costs. Check service intervals easily through the in-cab screen, which shows reminders when maintenance is needed.



# ATTACHMENTS VERSATILITY

The machine's attachment can be easily changed to save time and costs. Its design, hydraulics, piping and in-cab switches combined with the Volvo attachments range allows the EW60E to take on a variety of tasks. Volvo attachments work in harmony with the machine to deliver maximum productivity.

# One machine, many job sites

Volvo offers a wide range of durable attachments that are suitable for any job site, including utilities, building, agriculture, landscaping and forestry. Volvo attachments are an integrated part of the excavator for which they're intended – delivering maximum productivity and versatility.

## Quick coupler

Both the mechanical and the hydraulic quick couplers allow a complete range of buckets to be changed quickly and efficiently.



## Buckets

A complete range of buckets from general purpose reinforced buckets to ditching buckets, allow the machine to work on many job sites for a wide range of applications. The durable buckets can work in loose gravel, crushed rock, dirt and soil.



## Breaker

Volvo's durable hydraulic breakers have been designed for ultimate compatibility with Volvo excavators. The wide range of breaker tools (or bits) has been built to break all kinds of materials and combines excellent performance with low noise and vibration levels.



## Steelwrist tiltrotator

A factory ready Volvo compact excavator together with a Steelwrist® tiltrotator delivers the ultimate combination of high productivity, safety, precision and control. Steelwrist tiltrotators provide a superior tilt angle and the compact design with low build height results in improved digging performance and higher fuel efficiency. Get more done with your machine, without changing attachment or machine position.



# A compact machine with big potential

## BOOSTED PERFORMANCE

Do more in less time with outstanding combined digging efforts, powerful travel force, fluid swing force and optimal lifting capacity.

### Smooth operation

Smooth combined operations means you can make very accurate and precise movements.

### MATRIS and VCADS Pro

Volvo MATRIS analyses operator behaviour, improving efficiency and productivity. VCADS Pro helps to control your machine.

## ATTACHMENTS VERSATILITY

The Volvo attachments range allows the machine to take on a variety of tasks for a wide range of jobs and applications.

### Powerful Volvo Stage V engine

For the ultimate combination of power and performance, the engine helps to push through challenging conditions.

### Auto engine shutdown

The auto engine shutdown provides lower fuel costs, less noise, much lower maintenance costs and a greater resale value.

### ECO mode

Volvo's unique ECO mode improves fuel efficiency without any loss of performance in most operating conditions.



## LARGER CAB

A comfortable working space results in better operation, increasing production and reducing fatigue.



### Ease of control

The keypad groups all controls on the right hand side and the LCD screen displays all machine information for access to functions.

### Operator convenience

Ample storage space in the cab is available for operator comfort and convenience.

## SERVICEABILITY

Ground level service access, including great access to the main control valve, convenient greasing points and easy to clean cooling unit reduce service time.

## CUSTOMER SUPPORT AGREEMENTS

Customer Support Agreements offer preventive maintenance, total repairs and a number of uptime services.

### Wheeled performance

A top speed up to 18 mi/h (30km/h) and the four wheel drive allow you to go on and off-road for better mobility.

# Adding value to your business

Being a Volvo customer means having a complete set of services at your fingertips. Volvo can offer you a long-term partnership, protect your revenue and provide a full range of customer solutions using high quality parts, delivered by passionate people. Volvo is committed to increasing the positive return on your investment and maximising uptime.

## Complete Solutions

Volvo has the right solution for you. So why not let us provide all your needs throughout the whole life cycle of your machine? By

listening to your requirements, we can reduce your total cost of ownership and increase your revenue.



## Genuine Volvo Parts

Our attention to detail is what makes us stand out. This proven concept acts as a solid investment in your machine's future. Parts are extensively tested and approved because every part is vital for uptime and performance. Only by using Genuine Volvo Parts, can you be sure that your machine retains the renowned Volvo quality.

## Service Network

In order to respond to your needs faster, a Volvo expert is on their way to your job site from one of our Volvo facilities. With our extensive infrastructure of technicians, workshops and dealers, Volvo has a comprehensive network to fully support you using local knowledge and global experience.





# CUSTOMER SUPPORT AGREEMENTS

The range of Customer Support Agreements offer preventive maintenance, total repairs and a number of uptime services. Volvo uses the latest technology to monitor machine operation and status, giving you advice to increase your profitability. By having a Customer Support Agreement you are in control of your service costs.

# Volvo EW60E in detail

## Engine

The new engine which provides excellent performance is equipped with a four-cylinder, vertical, electronic controlled high pressure fuel injectors, in-line turbo charger and water cooled diesel engine type. This engine fully meets the demands of the latest Stage V emissions regulations.

Engine	Volvo	D2.6H
Max. power at	r/min	2 400
Net (ISO9249/SAEJ1349)	kW	45
	hp	61
Gross (ISO 14396/SAE J1995)	kW	47.3
	hp	64.3
Max. torque	Nm	222
at engine speed	r/min	1 500
No. of cylinders		4
Displacement	l	2.6
Bore	mm	87
Stroke	mm	110

## Electrical system

Voltage	V	12
Batteries	V	1 x 12
Battery capacity	Ah	100
Alternator	V/Ah	12/90
Start motor	V - kW	12 - 2.5

## Undercarriage

Drive train: One big variable axial-piston motor on the two-step Power Shift gearbox gives power to front and rear axles.  
 Framework: All-welded robust torsion box frame.  
 Front axle: Robust excavator axle with automatic or operator controlled front axle oscillation lock.

Oscillation	± °	5
with mudguards	± °	5
Tire	type	12-16.5 12PR
Tractive force (net)	kN	29
Travel speed, on road	km/h	20/30
Travel speed, off road	km/h	10
Min. turning radius	m	5.1
Travel speeds may depend on to local regulations		

## Cab

Refrigerant of the type R134a is used when this machine is equipped with air conditioning. Contains fluorinated greenhouse gas R134a, Global Warming Potential 1.430 t CO<sub>2</sub>-eq

## Sound Level

Sound pressure level in cab according to ISO 6396		
L <sub>pA</sub>	dB	78
External sound level according to ISO 6395 and EU Noise Directive 2000/14/EC		
L <sub>WA</sub>	dB	97

## Hydraulic system

Open-center, negative hydraulic system providing accurate controllability. The following working modes are included in the system:

**Parking mode (P):** Parking position for optimal safety.

**Travel mode (T):** Engine speed is controlled by travel pedal stroke and mode selection switch for low fuel consumption and noise. Work equipment are not able to move at this mode for optimal safety.

**Working mode (W):** Full working flow with adjustable engine rpm for normal working and best speed utilisation.

### Main pump (Type: Variable-displacement pump)

Max. flow	l/min	2 x 60
-----------	-------	--------

### Pilot pump (Type: Gear pump)

Max. flow	l/min	1 x 21.4
-----------	-------	----------

### Swing + steering pump (Type: Low noise gear pump)

Max. flow	l/min	1 x 38.9
-----------	-------	----------

### Relief valve setting pressure

Implement	MPa	23
Travel system	MPa	23
Slew system	MPa	19
Pilot system	MPa	3.1

## Hydraulic Cylinders

Boom		1
Bore x Stroke	ø x mm	110 x 707
Arm		1
Bore x Stroke	ø x mm	90 x 813
Bucket		1
Bore x Stroke	ø x mm	80 x 660
Dozer blade		1
Bore x Stroke	ø x mm	105 x 230
Boom swing		2
Bore x Stroke	ø x mm	90 x 570

## Brake system

**Service brakes:** servo-hydraulically manoeuvred self-adjusting wet multidiscs with two separate brake circuits.

**Parking brake:** negative wet disc in gear housing, spring applied and pressure released.

**Digging brake:** service brake with mechanical lock system.

**Security system:** The 2-circuit travel brakes are supplied with two accumulators in the event of failure in the service brake system.

## Swing system

**No need for gear oil replacement:** The lubricating system uses hydraulic operation oil for the reduction gear, eliminating the need for gear oil replacement.

**Built-in parking brake:** Parking brake can be built into the hydraulic motor, enabling safer parking on an incline.

**Shockless function:** Shockless relief is standard equipment to enable smooth traversing.

Max. slew speed	r/min	10
Max. slew torque	kNm	11.6

## Total Machine Weights



Machine with 2.9m boom, 1.6m arm, 0.142m<sup>3</sup> bucket, standard counterweight, dozer blade, 75kg operator weight and without quick coupler

With dozer blade	kg	5 920
------------------	----	-------



## Service Refill

Fuel tank	l	105
Hydraulic system, total	l	120
Hydraulic tank	l	76
Engine oil	l	11
Engine coolant	l	10
Transmission	l	1.7

# Specifications

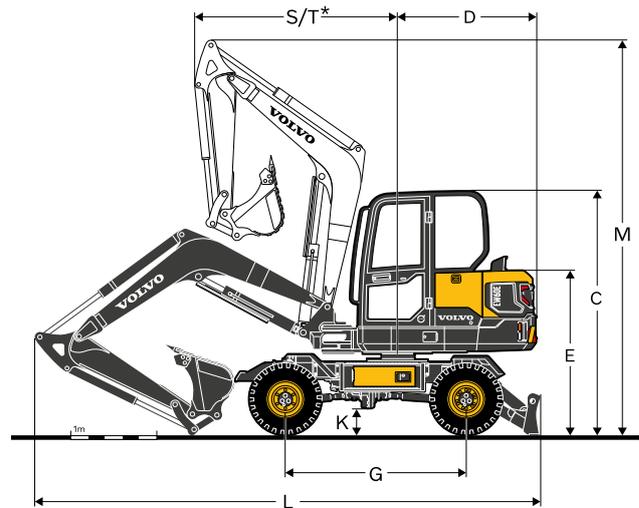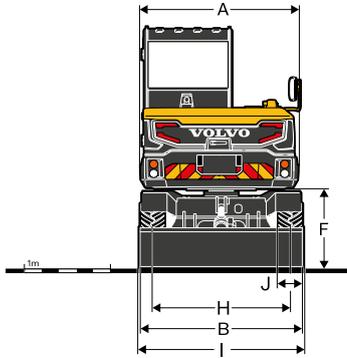


DIMENSIONS		EW60E		
<b>Boom</b>	<b>m</b>	<b>2.9</b>		
<b>Arm</b>	<b>m</b>	<b>1.6</b>	<b>1.9</b>	
A	Overall width of upper structure	mm	1845	1845
B	Overall width	mm	1930	1930
C	Overall height of cab	mm	2855	2855
D	Tail swing radius	mm	1650	1650
E	Overall height of engine hood	mm	1901	1901
F	Counterweight clearance	mm	960	960
G	Wheel base	mm	2100	2100
H	Tread width	mm	1595	1595
I	Dozerblade width	mm	1930	1930
J	Tire width	mm	305	305
K	Min. ground clearance	mm	295	295
L	Overall length	mm	5869	5895
M	Overall height of boom raise	mm	4599	4600
S	Front swing radius	mm	2352	2368
T*	Front swing radius(Max. offset)	mm	1386	1395
O	Boom swing distance	mm	756	756
P	Boom swing distance	mm	863	863
Q	Boom swing angle	°	80	
R	Boom swing angle	°	50	

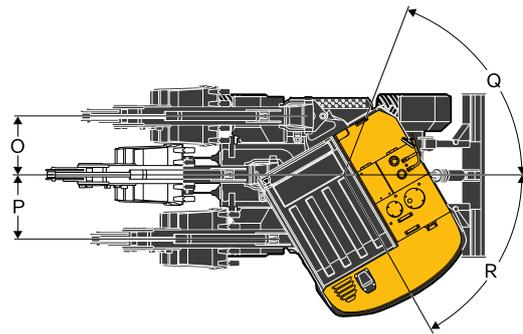

DIMENSIONS		Boom		Arm	
	<b>m</b>	<b>2.9</b>	<b>1.6</b>	<b>1.9</b>	
A	Length	mm	3008	2102	2402
B	Height	mm	1169	488	497
	Width	mm	336	300	300
	Weight	kg	352	206	181


Boom \* Includes cylinder, piping and pin, excludes boom cyl. Pin

Arm \* Includes cylinder, linkage and pin



DIMENSIONS		Dozer blade	
A	Height	mm	465
	Width	mm	1930
B	Lifting height	mm	440
C	Digging depth	mm	140

# Specifications

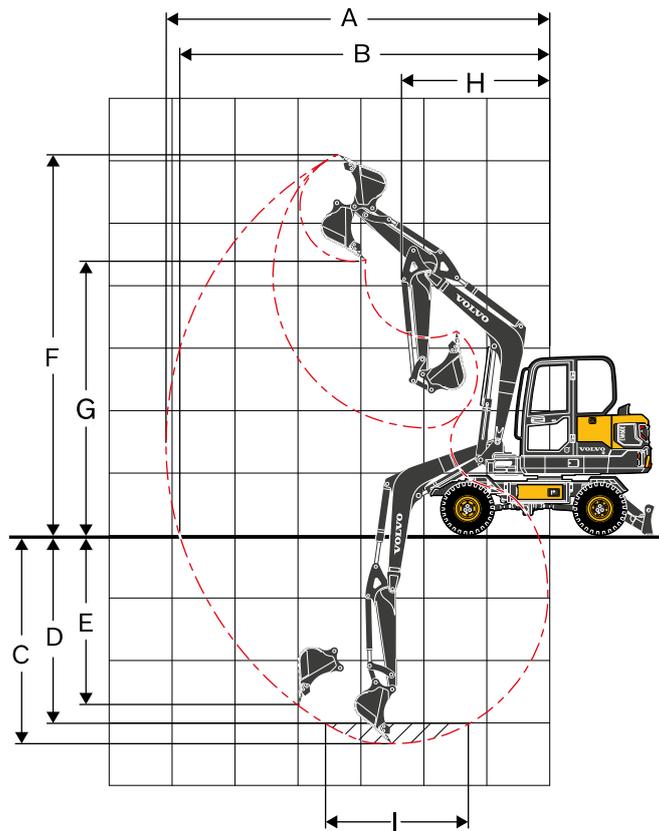

## WORKING RANGES

Description	Unit		
<b>Boom</b>	<b>m</b>	<b>2.9</b>	
<b>Arm</b>	<b>m</b>	<b>1.6</b>	<b>1.9</b>
A Max. digging reach	mm	6 024	6 313
B Max. digging reach on ground	mm	5 810	6 111
C Max. digging depth	mm	3 292	3 592
D Max. digging depth (l=2 440 mm level)	mm	2 905	3 188
E Max. vertical wall digging depth	mm	2 368	2 642
F Max. cutting height	mm	6 007	6 210
G Max. dumping height	mm	4 443	4 647
H Min. front swing radius	mm	2 350	2 367

## DIGGING FORCES WITH DIRECT FIT BUCKET

Breakout force (bucket)	SAE J1179	kN	37.7	37.7
	ISO 6015	kN	43.3	43.3
Tearout force (arm)	SAE J1179	kN	28.2	25.0
	ISO 6015	kN	28.8	25.4
Rotation angle, bucket		°	196	

## LIFTING CAPACITY EW60E

Lifting capacity at the arm end without bucket.

For lifting capacity including bucket. Simply subtract actual weight of the direct fit bucket or the bucket with quick coupler from the following values.

	Lifting hook related to ground level	kg	1.0 m		2.0 m		3.0 m		4.0 m		5.0 m		Max. reach		mm		
			Along UC	Across UC	Along UC	Across UC											
Boom: 2.9 m Arm: 1.6 m GP Shoe: Wheel CWT: 350 kg Machine: Front direction Dozer blade: Down	5.0 m	kg													*1 520	1 470	3 449
	4.0 m	kg							*1 520	1 170					*1 270	980	4 421
	3.0 m	kg							*1 610	1 150					*1 190	810	4 947
	2.0 m	kg						*2 540	1 690	*1 840	1 100	*1 530	780	*1 200	740	5 190	
	1.0 m	kg						*3 030	1 580	*2 040	1 050	*1 570	770	*1 280	720	5 197	
	0.0 m	kg			*2 110	*2 110	*3 040	1 540	*2 070	1 030				*1 470	760	4 969	
	-1.0 m	kg	*3 000	*3 000	*4 060	3 020	*2 650	1 540	*1 800	1 020				*1 420	890	4 464	
	-2.0 m	kg			*2 450	*2 450	*1 680	1 590						*1 180	*1 180	3 530	
Boom: 2.9 m Arm: 1.6 m GP Shoe: Wheel CWT: 350 kg Machine: Front direction Dozer blade: Up	5.0 m	kg												*1 520	1 380	3 449	
	4.0 m	kg							*1 520	1 100					*1 270	920	4 421
	3.0 m	kg							*1 610	1 080					*1 190	760	4 947
	2.0 m	kg						*2 540	1 580	*1 840	1 030	1 410	740	*1 200	690	5 190	
	1.0 m	kg						*3 030	1 480	1 950	990	1 390	720	*1 280	680	5 197	
	0.0 m	kg			*2 110	*2 110	*3 040	1 440	1 920	960				1 390	710	4 969	
	-1.0 m	kg	*3 000	*3 000	*4 060	2 770	*2 650	1 440	*1 800	960				*1 420	830	4 464	
	-2.0 m	kg			*2 450	*2 450	*1 680	1 480						*1 180	1 180	3 530	
Boom: 2.9 m Arm: 1.6 m GP Shoe: Wheel CWT: 350 kg Machine: Rear direction Dozer blade: Down	5.0 m	kg												*1 520	1 470	3 449	
	4.0 m	kg							*1 520	1 170					*1 270	980	4 421
	3.0 m	kg							*1 610	1 150					*1 190	810	4 947
	2.0 m	kg						*2 540	1 690	*1 840	1 100	*1 530	780	*1 200	740	5 190	
	1.0 m	kg						*3 030	1 580	*2 040	1 050	*1 570	770	*1 280	720	5 197	
	0.0 m	kg			*2 110	*2 110	*3 040	1 540	*2 070	1 030				*1 470	760	4 969	
	-1.0 m	kg	*3 000	*3 000	*4 060	3 020	*2 650	1 540	*1 800	1 020				*1 420	890	4 464	
	-2.0 m	kg			*2 450	*2 450	*1 680	1 590						*1 180	*1 180	3 530	
Boom: 2.9 m Arm: 1.6 m GP Shoe: Wheel CWT: 350 kg Machine: Rear direction Dozer blade: Up	5.0 m	kg												1 370	1 380	3 449	
	4.0 m	kg							1 100	1 100					920	920	4 421
	3.0 m	kg							1 080	1 080					760	760	4 947
	2.0 m	kg						1 570	1 580	1 030	1 030	740	740	690	690	5 190	
	1.0 m	kg						1 470	1 480	990	990	720	720	680	680	5 197	
	0.0 m	kg			*2 110	*2 110	1 430	1 440	960	960				720	710	4 969	
	-1.0 m	kg	*3 000	*3 000	2 740	2 770	1 430	1 440	960	960				830	830	4 464	
	-2.0 m	kg			*2 450	*2 450	1 470	1 480						1 180	1 180	3 530	
Boom: 2.9 m Arm: 1.9 m GP Shoe: Wheel CWT: 350 kg Machine: Front direction Dozer blade: Down	5 m	kg												*1 200	*1 200	3 908	
	4 m	kg							*1 350	1 180					*1 030	870	4 769
	3 m	kg							*1 470	1 150	*1 380	800	*970	730	5 254		
	2 m	kg						*2 300	1 710	*1 720	1 100	*1 450	780	*980	670	5 480	
	1 m	kg						*2 890	1 580	*1 970	1 050	*1 530	750	*1 040	660	5 487	
	0 m	kg	*1 330	*1 330	*2 060	*2 060	*3 050	1 520	*2 060	1 010	*1 520	740	*1 170	690	5 275		
	-1 m	kg	*2 520	*2 520	*3 610	2 950	*2 790	1 510	*1 900	1 000				*1 340	780	4 808	
	-2 m	kg	*4 040	*4 040	*3 130	3 010	*2 040	1 540						*1 200	1 040	3 977	
Boom: 2.9 m Arm: 1.9 m GP Shoe: Wheel CWT: 350 kg Machine: Front direction Dozer blade: Up	5 m	kg												*1 200	1 130	3 908	
	4 m	kg							*1 350	1 110					*1 030	820	4 769
	3 m	kg							*1 470	1 090	1 370	750	*970	690	5 254		
	2 m	kg						*2 300	1 600	*1 720	1 030	1 350	730	*980	630	5 480	
	1 m	kg						*2 890	1 480	1 870	980	1 320	710	*1 040	610	5 487	
	0 m	kg	*1 330	*1 330	*2 060	*2 060	2 950	1 420	1 830	940	1 300	690	*1 170	640	5 275		
	-1 m	kg	*2 520	*2 520	*3 610	2 710	*2 790	1 410	1 810	930				*1 340	730	4 808	
	-2 m	kg	*4 040	*4 040	*3 130	2 770	*2 040	1 430						*1 200	970	3 977	
Boom: 2.9 m Arm: 1.9 m GP Shoe: Wheel CWT: 350 kg Machine: Rear direction Dozer blade: Down	5 m	kg												*1 200	*1 200	3 908	
	4 m	kg							*1 350	1 180					*1 030	870	4 769
	3 m	kg							*1 470	1 150	*1 380	800	*970	730	5 254		
	2 m	kg						*2 300	1 710	*1 720	1 100	*1 450	780	*980	670	5 480	
	1 m	kg						*2 890	1 580	*1 970	1 050	*1 530	750	*1 040	660	5 487	
	0 m	kg	*1 330	*1 330	*2 060	*2 060	*3 050	1 520	*2 060	1 010	*1 520	740	*1 170	690	5 275		
	-1 m	kg	*2 520	*2 520	*3 610	2 950	*2 790	1 510	*1 900	1 000				*1 340	780	4 808	
	-2 m	kg	*4 040	*4 040	*3 130	3 010	*2 040	1 540						*1 200	1 040	3 977	
Boom: 2.9 m Arm: 1.9 m GP Shoe: Wheel CWT: 350 kg Machine: Rear direction Dozer blade: Up	5 m	kg												*1 200	1 130	3 908	
	4 m	kg							*1 350	1 110					*1 030	820	4 769
	3 m	kg							*1 470	1 090	1 370	750	*970	690	5 254		
	2 m	kg						*2 300	1 600	*1 720	1 030	1 350	730	*980	630	5 480	
	1 m	kg						*2 890	1 480	1 870	980	1 320	710	*1 040	610	5 487	
	0 m	kg	*1 330	*1 330	*2 060	*2 060	2 950	1 420	1 830	940	1 300	690	*1 170	640	5 275		
	-1 m	kg	*2 520	*2 520	*3 610	2 710	*2 790	1 410	1 810	930				*1 340	730	4 808	
	-2 m	kg	*4 040	*4 040	*3 130	2 770	*2 040	1 430						*1 200	970	3 977	

Notes: 1. The above loads are in compliance with SAE J1097 and ISO 10567 Hydraulic Excavator Lifting Capacity Standards. 2. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. 3. Rated loads marked with an asterisk (\*) are limited by hydraulic capacity rather than tipping load.

# Equipment

## STANDARD EQUIPMENT

### Engine

Low-emission Volvo Stage V diesel engine  
 Standard cooling system  
 Two-stage air filter  
 Fuel filter and water separator  
 Alternator, 90 A

### Electric / Electronic control system

Safe engine start function  
 Automatic idling system  
 Halogen working lights;  
 Cab-mounted 1 (Front), Boom-mounted 1(LH)  
 Battery, 12 V / 100 Ah  
 Start motor, 12 V / 2.5 kW  
 Monitor and keypad  
 Master electrical disconnect switch  
 Travel alarm

### Frame

Rearview mirror  
 350kg counterweight  
 Under cover  
 Dozer blade

### Undercarriage

Tyre: 12.00-16.5 12PR

### Hydraulic system

Automatic two speed travel motors  
 Cylinder cushioning  
 Hydraulic fluid mineral 46  
 Travel motor (30km/h)

### Cab and interior

Cab  
 Fabric operator seat with suspension  
 Seat belt, 2 inch retractable  
 Control joystick  
 Radio with MP3/AUX  
 Master key  
 Hour meter (non analog)

### Digging equipment

Boom: 2.9m, Arm: 1.6m  
 Offset boom  
 Linkage

### Service

Tool kit-daily maintenance

## OPTIONAL EQUIPMENT

### Engine

Water separator (With heater)  
 Engine auto shut down

### Electric / Electronic control system

Fuel filler pump: 35 l/min, with automatic shut-off  
 Halogen extra working lights;  
 Cab-mounted 1 (Rear)  
 Boom-mounted 1(RH)  
 Caretrack  
 Rotating warning beacon  
 Electric pilot control change  
 Rearview Camera  
 Electric dozer blade switch on joystick  
 LED Light

### Hydraulic system

Hydraulic piping:  
 Breaker (X1 Single Acting)  
 Breaker & shear (X1 Double Acting)  
 Slope & rotator (X3)  
 Thumb (with three way valve)  
 Grapple  
 Quick coupler  
 Hose rupture valve for boom, arm  
 Overload warning device  
 Hydraulic oil, ISO VG 32, 68  
 Hydraulic oil, biodegradable 46  
 Hydraulic oil, longlife oil 32, 46, 68  
 Travel motor (20km/h)

### Cab and interior

Heater and air-conditioner  
 Fabric operator seat with suspension with heater  
 PVC operator seat with suspension  
 Control joystick, X3 proportional  
 Radio with MP3/AUX/Bluetooth  
 Mechanical hour meter  
 Cab mounted FOG (Falling Object Guard)  
 FOPS (Falling Object Protection Structure)  
 Sun screen, front/roof

### Digging equipment

Fixed boom  
 Long arm: 1.9m

### Service

Tool kit, full scale  
 Spare parts

---

**SELECTION OF VOLVO OPTIONAL EQUIPMENT**

---

**Electric dozer blade switch on joystick**



**Rear view camera**



**Auxiliary hydraulic piping (X3)**



**LED Light**



**Heated seat**



**Fixed boom**



Not all products are available in all markets. Under our policy of continuous improvement, we reserve the right to change specifications and design without prior notice. The illustrations do not necessarily show the standard version of the machine.

