
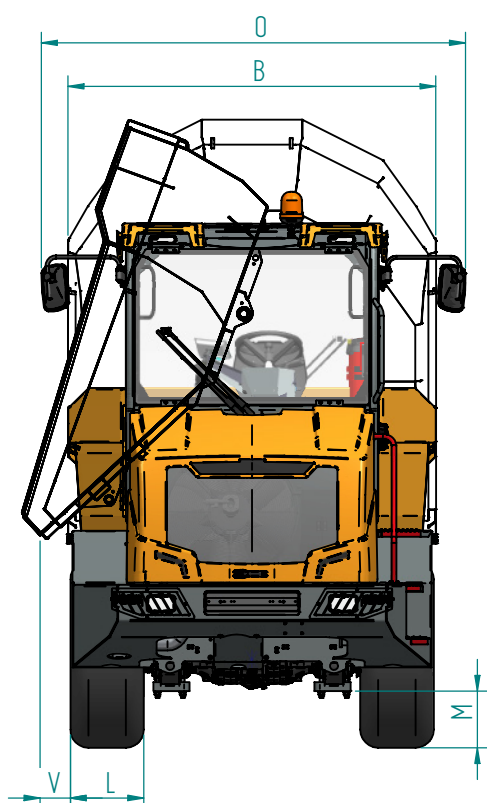


BERGMANN III C 807

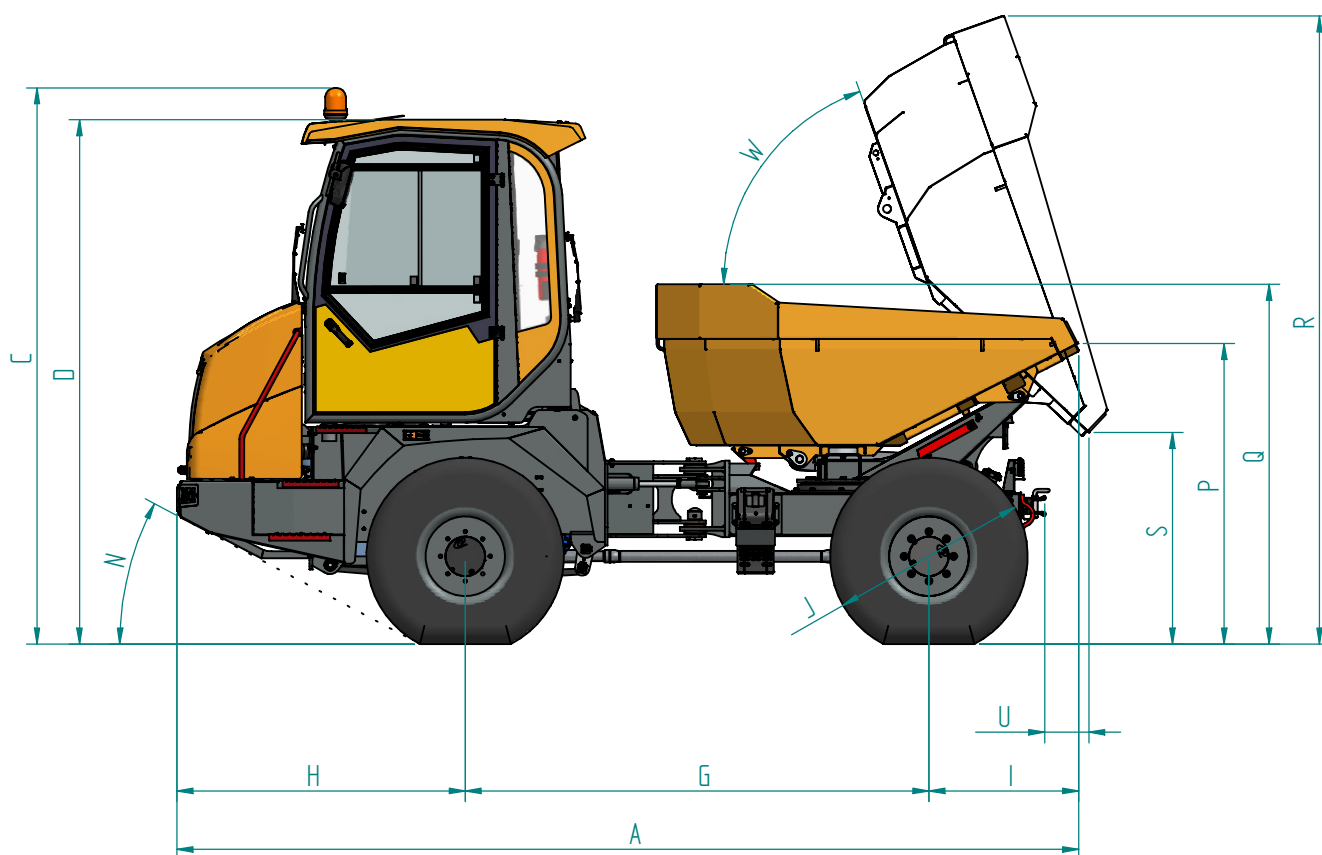

Dimensions

A	5,008 mm
B	2,043 mm
C	3,088 mm
D	2,970 mm
G	2,575 mm
H	1,601 mm
I	832 mm
J	1,097 mm
L	408 mm
M	314 mm
N	28°
O	2,355 mm
P	1,669 mm
Q	1,997 mm
R	3,488 mm
S	1,175 mm
U	246 mm
V	168 mm
W	70°

Weight

Unladen weight	4,850 kg
Payload	6,000 kg

Dumper box

Dumper box content level	2.5 m ³
Dumper box content heaped	3.6 m ³

All figures, dimensions and weights do not always represent the actual series equipment and are therefore subject to tolerance deviations and not binding. Subject to technical modifications.

BERGMANN

Technical data

Highlights

- High transport performance due to suspended front axle
- Full cabin with revolving seat for fast work in both directions
- Exhaust gas level 5 without AdBlue
- Exit outside the danger area
- Tippable cabin for good maintenance accessibility

Engine

Water-cooled 4-cylinder Deutz diesel engine	
Engine power	55 kW
Max. torque	300 Nm at 2,200 rpm
Exhaust emission standard	Exhaust stage 5

Drive unit

Hydrostatic all-wheel drive with automotive control	
Drive stage I	0-8 km/h
Drive stage II	0-28 km/h

Steering

Hydraulic articulated steering active via priority valve; articulation: 34° left and right

Axles/brakes

- Front axle with leaf spring suspension, rear axle rigid• Maintenance-free oil bath multi-disc brakes with automatic readjustment in the front axle
- Hydraulically actuated parking brake via prop shaft acting on the front and rear axles

Standard tires

All power wheels 405/70 R20 AS tread

Filling quantities

Fuel	54 L
Hydraulic oil	43.5 L

Electrical system

- 12 V electrical system with main switch
- All vehicle-specific data can be read on the vehicle display

Standard equipment

- Adjustable hydraulic swing seat
- Instrument panel with ignition lock
- Rear towing hitch
- Lighting system according to road traffic licensing regulations
- Revolving seat
- CE declaration of conformity
- Operating instructions/Spare parts list